



Specifications

Model	TX2	TX3	TX6
Printing Method	Direct Thermal and Thermal Transfer		
Resolution	203 dpi (8 dots/mm)	300 dpi (11.8 dots/mm)	600 dpi (23.6 dots/mm)
Printing speed	10 ips (254 mm/s)	8 ips (203.2 mm/s)	4 ips (101.6 mm/s)
Max printing width	4.09" (104 mm)	4.17" (106 mm)	
Max printing length	157" (4000 mm)	79" (2000 mm)	19.6" (500 mm)
CPU / Memory	32-bit ARM Processor / 4 MB FLASH ROM, 8 MB SDRAM		
Media	Width: 4.56" (116 mm) max., 0.79" (20 mm) min. Supply roll: OD 8" (203.2 mm) max., ID 1.5" (38 mm) min. Thickness: 0.0024" ~ 0.012" (0.06 ~ 0.305 mm), including liner		
Ribbon	Ribbon roll: OD 3.3" (84 mm) max., ID 1" (25.4 mm) core Max width: 4.65" (118 mm); Max length: 1968' (600 m). Ink side: In and Out		
Media Sensors	Reflective (Adjustable) / Transmissive (Adjustable)		
Fonts	Five built-in ASCII fonts		
Bar Code Types	ID: Code 39, Code 93, Code 128/subset A,B,C Codabar, Interleave 2 or 5 UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128 2D: MaxiCode, PDF 417, Data Matrix, QR		
Interfaces	RS-232 Serial, USB, Centonics Parallel and PS/2		
Dimensions	W 11.3" (286 mm) x D 17.6" (448 mm) x H 11" (280 mm)		
Optional*	External Rewinder, Rotary Cutter and Internal 10/100 Ethernet Interface Card		
Warranty	Printers (except normal wear items) and spare parts: 36 months Wear items (printhead, platen roller) and optional accessories: 12 months		

* Some optional items may require minimum quantities and/or factory installation. Please contact a Postek sales representative for complete details.

All specifications are subject to change without notice.

Label Examples

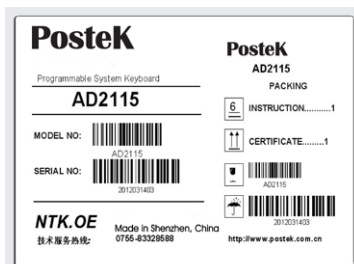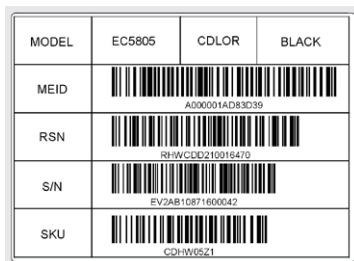

Visit us at www.postektechnologies.com

Postek

Postek Technologies, Inc.
301 N. Pine Meadow Dr., Suite D DeBary, FL 32713
T | (407) 843.9939
F | (407) 843.9938